

Electronic Pressure Switch

Type UDS1V2

Electronic pressure switch for pressure control with internal stainless steel diaphragm, with 2 solid state outputs or 1 solid state output with adjustable hysteresis.

Features

- Teach & Go
- Compact construction
- Housing 320° rotatable

Measuring ranges

0 ...10 bar to 0...600 bar

Applications

OEM applications in hydraulic and pneumatic systems, press construction, lubricant monitoring, apparatus engineering, machine/machine tool industry, automobile industry, injection molding machines



Technical Data

Sensor element:	Ceramic sensor optional: piezoresistive sensor; at 600 bar: only piezoresistive sensor
Materials: Wetted parts: Electronics housing: Seals:	Steel, pass., Al2O3 PA 6.6 FKM
Operating elements:	2 easy response push buttons
System of protection:	IP65
Protection class:	III
Process connection:	G 1/4" AG Others on request
Dimensions:	approx. Ø 28 x 100 mm (without plug connector)
Measuring ranges:	0...10 bar to 0...600 bar 0...150 to 0...9000 PSI
Electrical connection:	Plug M12x1, 4-pin

Temperature influence:	± 0.2 % f.s./10K
Compensation range:	-10 °C...+70 °C
Repeatability:	+/- 1 % f.s.
Temperature range: Medium: Electronics: Storage:	-25 °C...+100 °C -25 °C...+80 °C -30 °C...+80 °C
Power supply:	15...32 V DC, reversed polarity protected (SELV, PELV)
Transistor switching outputs PNP: Adjustment range for switching point- and hysteresis*: frequency: current rating:	0 % ...100 % f.s. Max. 100 Hz Max. 200 mA, short-circuit proof
Vibration	10 g/20...2000 Hz
Shock	100 g/11 ms

* only 1SP version (2SP version 15% hysteresis)


Techniquip Ltd
The Old Brewery
Norton Fitzwarren
Taunton
TA2 6RN
Tel 01823-351255
eMail sales@techniquip.co.uk
www.techniquip.co.uk




Electronic Pressure Switch

Type UDS1V2


Connection Diagram 1

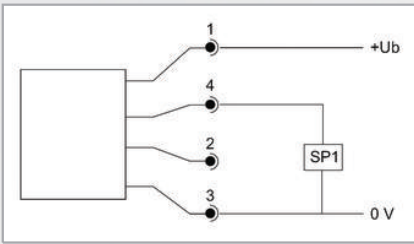


Connection Diagram 2

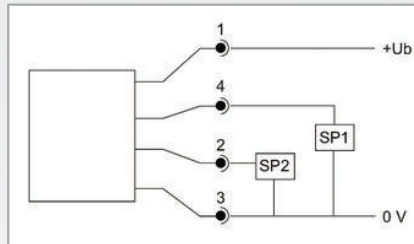

Plug



Dimensions (mm / inch)

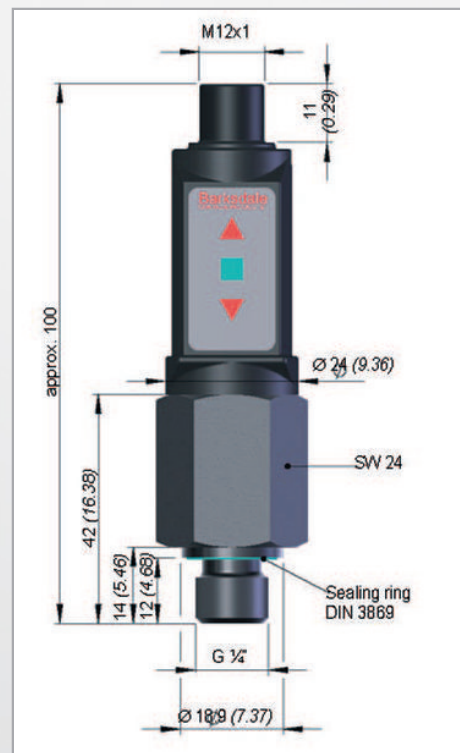

Order Numbers

Pressure range	0...10 bar	0...100 bar	0...400 bar	0...600 bar
1 switching output with adjustable hysteresis	0421-060	0421-061	0421-062	0421-063
2 switching outputs with 15% hysteresis	0421-064	0421-065	0421-066	0421-067

Accessories

Order Number	Description
907-0357	Plug connector M12x1, 4-pin, with screw terminals, angled
907-0344	Plug connector M12x1, 4-pin, with screw terminals, straight

Techniquip Ltd
 The Old Brewery
 Norton Fitzwarren
 Taunton
 TA2 6RN
 Tel 01823-351255
 eMail sales@techniquip.co.uk
 www.techniquip.co.uk



Techniquip