



Uniflux




Features

- Panel mounting flow meter
- In-Line or rear facing connections
- Standard scales for Air, Water and common gases
- Custom scales for alternative liquids and gases
- Adjustable alarm options
- 2 wire, 4 - 20mA transmitter option
- Optional integral needle valve
- Brass or St. Steel material

Specification

- Gas ranges** 5cc/min to 100 l/min (Air equiv)
- Liquid ranges** 1cc/min to 4.4 l/min (H2O equiv)
- Scales lengths** 30mm(compact) 100mm (standard)
- Accuracy** Class 2.5 VDI/VDE
- Repeatability** Better than 0.5%
- Temp Range** -15 to 120 oC
- Pressure** 20 Barg - non shock
- Connections** 1/4" BSPF In-Line or rear facing
- Conn Mat'l** Nickel Plated Brass or St Steel
- Seals** Viton
- Tube** Borosilicate Glass
- Float** St Steel, Anodised Aluminium or Acetal

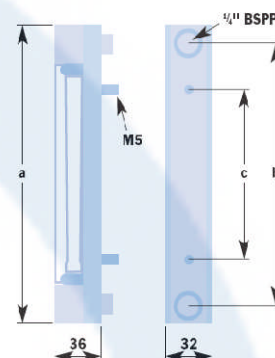

mm	Compact	Standard
a	133	210
b	108	184
c	65	121

Example SV1B - Flow Range

- Model** _____
- C** = Compact
- S** = Standard
- Style** _____
- A** = Angled Conns
- S** = Straight Conns
- V1** = Valved Size 1
- V2** = Valved Size 2
- Connection Mat'l** _____
- S** = St Steel
- B** = Brass

Use - V1 for flow <13 l/min Air or V2 for flow >13 l/min Air or equiv.

Compact

For flow ranges other than those listed, please provide:

- Nominal flow req'd
- Fluid properties
- Working pressure
- Operating temperature

	Water	Air
cc/min	10-80	20-200
	25-250	50-500
	100-700	100-1000
	0.2-1	0.2-1
L/min		0.5-2.5
		0.5-5
		2-12
		5-25

Standard Glass Tubes - 100mm Scale

	Water	Air	Argon	Butane	Carbon Dioxide	Carbon Monoxide	Cracked Ammonia	Helium	Hydrogen	Methane	Nitrogen	Oxygen	Propane	
cc/min	1-10													
	2-25	5-100	5-80	20-130	10-100	10-100	10-120	5-100	20-250	10-150	5-100	5-90	10-140	
	4-60	20-250	20-200	50-290	20-250	20-270	30-360	20-280	40-600	40-360	20-250	20-220	40-300	
	20-280	60-600												
	40-480	50-750	40-660	100-800	50-750	50-800		50-800			50-800	50-700	100-850	
L/min	0.1-1.5								0.1-1.2	0.1-1.1				
	0.3-3	0.1-1.2	0.1-1	0.1-1.1	0.1-1.1	0.1-1.2	0.1-1.8	0.1-1.8	0.2-3.4	0.1-1.7	0.1-1.2	0.1-1.1	0.1-1.2	
	0.4-4.4	0.2-2	0.2-1.7	0.4-2	0.2-1.8	0.2-2	0.3-3	0.2-3	0.4-5.6	0.4-2.8	0.2-2	0.2-1.8	0.3-2.2	
		0.3-3	0.2-2.6		0.3-2.8	0.2-3		0.4-5	0.5-10	0.4-4.4	0.3-3	0.4-2.8	0.4-3.1	
		0.6-5	0.4-4	0.8-4	0.6-4.4	0.6-5	1-8	0.5-9	1-15	1-7	0.6-5	0.4-4.4	0.8-4.8	
		1-10	1-8					2-20						
		1-13	1-11	1-10	1-11	1-12	2-22	1-28	2-46	1-18	1-13	1-12	1-11	
		2-26	2-22			2-20	2-26	4-48	2-60	5-95	2-36	2-27	2-25	2-22
		4-50	4-44			4-40		10-90	5-120	10-180	5-70	4-50	4-50	4-40
		10-100	10-90			10-80		20-180	20-270	40-400	15-140	10-100	10-100	10-85

Calibrations Stated at 20oC and 760mm Hg