

# Flow Switches

## BFS-10-N / BFS-10-O

for monitoring liquids,  
with or without optical display

### Features

set point continuously adjustable  
rugged, low hysteresis, any mounting position,  
high accuracy and functional safety

### Measuring ranges

0,005...0,06 l/min to 60...150 l/min for water

### Applications

Measuring and monitoring of liquids,  
e. g. in cooling systems, test beds, pumps etc.



### Technical Data

BFS-10-N (without indication)				
Measuring principle:	variable aera flow meter			
<b>Materials:</b> Var. aera flow meter:	brass version	stainless steel vers.		
	brass	1.4571	1.4571	
	Spring:	brass, nickel-plated	1.4571	1.4571
	Fitting:	brass, nickel-plated	1.4571	1.4571
	Housing:	ferrite	ferrite	ferrite
<b>Operating pressure:</b>	brass	SS	Pressure drop	
	BFS-10-N G1/4:	PN 300 bar	350 bar 0,02...0,2 bar	
	BFS-10-N G1/2:	PN 300 bar	350 bar 0,02...0,3 bar	
BFS-10-N G1:	PN 250 bar	300 bar 0,02...0,4 bar		
Operating temp.:	100 °C (standard), 160 °C (option HT)			
Accuracy:	±10% f. s.			
Electrical connection:	plug acc. to DIN EN 175301-803 (DIN 43650C)			
<b>Contact rating:</b>	BFS-10-N G1/4	200 V / 1 A / 20 VA	(NO)	
	BFS-10-N G1/2	200 V / 1 A / 20 VA	(SPDT)	
	BFS-10-N G1	230 V / 3 A / 60 VA	(NO)	
		250 V / 1,5 A / 50 VA	(SPDT)	
<b>Protection class:</b>	IP65 (plug acc. to DIN EN 175301-803 formaly DIN 43650C)			
	IP67 (with moulded cable)			
Approvals:	e.g. ATEX, see www.barksdale.de			

### Switch ranges

(water in l/min)

BFS-10-N G1/4:	BFS-10-N G1/2:	BFS-10-N G1:
0,005...0,06	0,02...0,2	10...30
0,04...0,13	0,2...0,6	15...45
0,1...0,6	0,4...1,8	20...60
0,2...1,2	0,8...3,2	30...90
0,4...2,0	2,0...7,0	60...150
0,5...3,0	3,0...13	
1,0...5,0	4,0...20	
	8,0...30	

### Technical Data

BFS-10-O (with optical indication)				
Measuring principle:	variable aera flow meter			
<b>Materials:</b> Var. aera flow meter:	brass version	stainless steel vers.		
	brass	1.4571	1.4571	
	Spring:	brass, nickel-plated	1.4571	1.4571
	Fitting:	brass, nickel-plated	1.4571	1.4571
	Display Housing:	alumin., anodized	alumin., anodized	alumin., anodized
<b>Operating pressure:</b>	Duran 50	Duran 50	Duran 50	
	Glass:	ferrite	ferrite	
	Magnets:	ferrite	ferrite	
<b>Operating pressure:</b>	brass	SS	Pressure drop	
	BFS-10-O G1/4:	PN 16 bar	16 bar 0,02...0,2 bar	
	BFS-10-O G1/2:	PN 16 bar	16 bar 0,02...0,3 bar	
BFS-10-O G1:	PN 10 bar	10 bar 0,02...0,4 bar		
Operating temp.:	100 °C (standard), 160 °C (option HT)			
Accuracy:	±10% f. s.			
Electrical connection:	plug acc. to DIN EN 175301-803 (formaly DIN 43650C)			
<b>Contact rating:</b>	BFS-10-O G1/4	200 V / 1 A / 20 VA	(NO)	
	BFS-10-O G1/2	200 V / 1 A / 20 VA	(SPDT)	
	BFS-10-O G1	230 V / 3 A / 60 VA	(NO)	
		250 V / 1,5 A / 50 VA	(SPDT)	
<b>Protection class:</b>	IP65 (plug acc. to DIN EN 175301-803 formaly DIN 43650C)			
	IP67 (with moulded cable)			
Approvals:	e.g. ATEX, see www.barksdale.de			

### Switch ranges

(water in l/min)

BFS-10-O G1/4:	BFS-10-O G1/2:		BFS-10-O G1:
0,005...0,06	0,2...0,5	8,0...20	8,0...30
0,025...0,13	0,3...1,0	9,5...24	15...45
0,1...0,6	0,7...2,0	12...28	30...90
0,2...1,2	1,6...4,0		60...150
0,4...2,0	3,0...8,0		
0,5...3,0	4,5...12		
1,0...5,0	6,0...15		


## Flow Switches

## BFS-10-N / BFS-10-O


### Dimensions (mm / inch)

Dimensions (in mm)


**BFS-10-N**

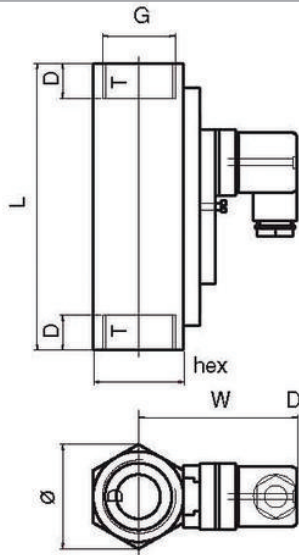

**BFS-10-O**

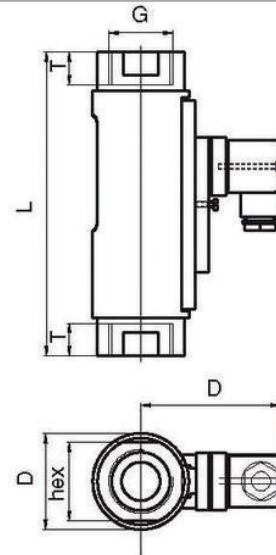

#### Wiring diagram



(G)	G 1/4	G 1/2	G 1
(hex)	17	27	41
(Ø)	17	31	47
(W)	47	52	76
(D)	10	14	17
(L)	65	90	130
Weight (g)	140	350	1050

(G)	G 1/4	G 1/2	G 1
(hex)	17	27	41
(Ø)	20	32	50
(W)	49	53	77
(D)	10	14	17
(L)	90	114	158
Weight (g)	140	300	900

### Order Numbers

BFS-10-N	BFS-10-O
Brass	Brass
0711-256 BFS-10-N-G1/4-MS-NO-ST	0711-250 BFS-10-O-G1/4-MS-NO-ST
0711-338 BFS-10-N-G1/4-MS-WE-ST	0711-332 BFS-10-O-G1/4-MS-WE-ST
0711-257 BFS-10-N-G1/2-MS-NO-ST	0711-347 BFS-10-O-G1/2-MS-NO-ST
0711-339 BFS-10-N-G1/2-MS-WE-ST	0711-348 BFS-10-O-G1/2-MS-WE-ST
0711-258 BFS-10-N-G1-MS-NO-ST	0711-252 BFS-10-O-G1-MS-NO-ST
0711-340 BFS-10-N-G1-MS-WE-ST	0711-334 BFS-10-O-G1-MS-WE-ST
Stainless Steel	Stainless Steel
0711-259 BFS-10-N-G1/4-SS-NO-ST	0711-253 BFS-10-O-G1/4-SS-NO-ST
0711-341 BFS-10-N-G1/4-SS-WE-ST	0711-335 BFS-10-O-G1/4-SS-WE-ST
0711-260 BFS-10-N-G1/2-SS-NO-ST	0711-349 BFS-10-O-G1/2-SS-NO-ST
0711-342 BFS-10-N-G1/2-SS-WE-ST	0711-350 BFS-10-O-G1/2-SS-WE-ST
0711-261 BFS-10-N-G1-SS-NO-ST	0711-255 BFS-10-O-G1-SS-NO-ST
0711-343 BFS-10-N-G1-SS-WE-ST	0711-337 BFS-10-O-G1-SS-WE-ST

Order number example: Order number + switching range = 0711-339, 2,0...7,0 l/min

### Description

NO = normally open	O = with indication	MS = brass	Please specify switching range (see table on page previous) additional to order number.
WE = change-over	N = without indication	SS = stainless steel	

